


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1042	A	RELEASED	HYO	10/15/01	JWM	12/27/01	DJC	1/3/02

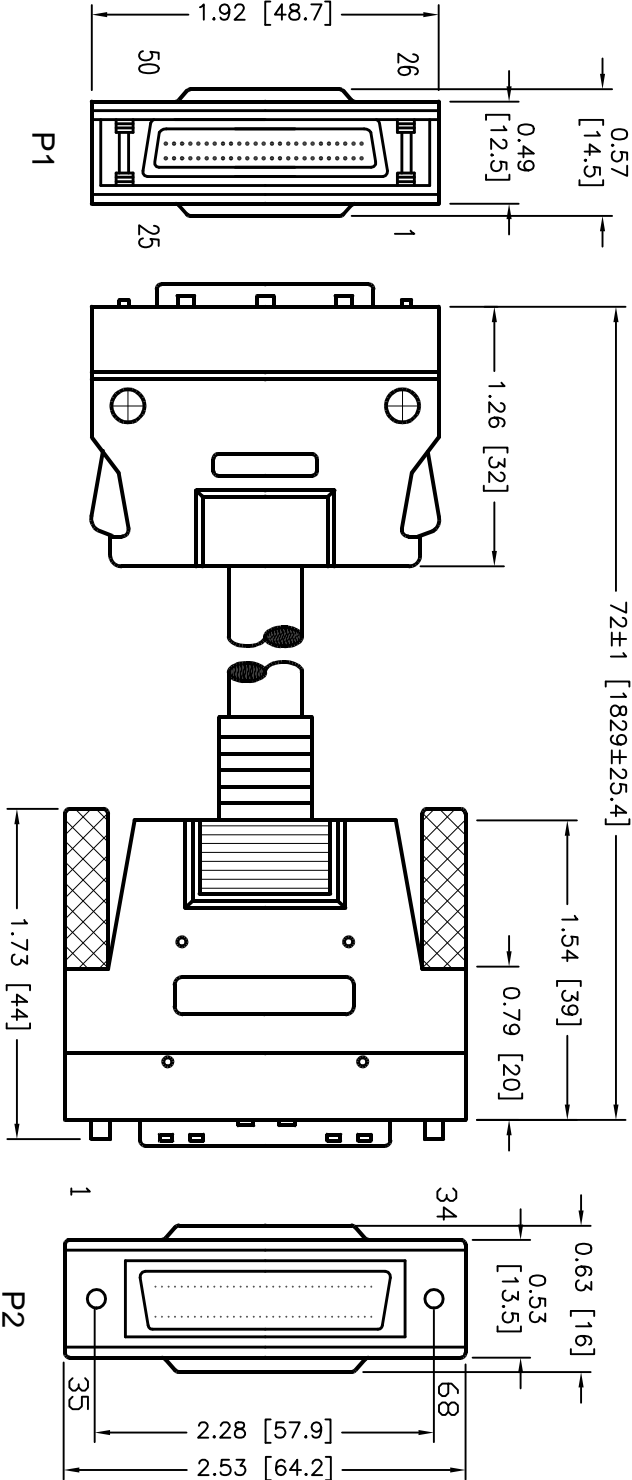

# PIN OUT

P1	P2	P1	P2	P1	P2	P1	P2
1	6	26	40	14	19	39	53
2	7	27	41	15	20	40	54
3	8	28	42	16	21	41	55
4	9	29	43	17	22	42	56
5	10	30	44	18	23	43	57
6	11	31	45	19	24	44	58
7	12	32	46	20	25	45	59
8	13	33	47	21	26	46	60
9	14	34	48	22	27	47	61
10	15	35	49	23	28	48	62
11	16	36	50	24	29	49	63
12	17	37	51	25	30	50	64
13	18	38	52	Shell	Shell		

## NOTES:

### 1.MOLDED CONNECTOR END REQUIREMENTS:

- A. INNER MOLD USING PE
- B. COPPER FOIL WRAP AND 360° SOLDER TO CONNECTOR
- C: PVC - 45P PLATINUM GRAY

### 2. CABLE:

- 28AWG (7/0.127), 25 PAIRS
- DRAIN WIRE (7/0.163)
- TIN BRAID SHIELD
- JACKET: 80°C PVC, OD= Ø8.0±0.20mm
- COLOR: PLATINUM GRAY

### 3. THUMBSCREW: 6\*57mm, NICKEL PLATING

### 4. CONCERTOS:

- P1) HALF-PITCH DB 50 PIN MALE NICKEL PLATING
- INSULATION COLOR: BLACK
- P2) HALF-PITCH DB 68 PIN MALE NICKEL PLATING
- INSULATION COLOR: BLACK



SPC TECHNOLOGY

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

## UNLESS OTHERWISE SPECIFIED,

DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

SPC-F005.DWG

DRAWN BY:	DATE:	DRAWING TITLE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
HISHAM ODISH	10/15/01	SCSI III SERIES CABLE, HP 50 PIN M/ HP 68 PIN M	A	SPC10523	19C8377.DWG	A
CHECKED BY:	DATE:	SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET:	1 OF 1
JEFF MCWICKER	12/27/01					
APPROVED BY:	DATE:					
DANIEL CAREY	1/3/02					